

Subject: West Geauga Schools car donation
From: Tim Carroll <tcarroll@russellpolice.com>
Date: 3/23/2018 3:44 PM
To: Fiscal Officer Walder <cwalders@russelltownship.us>

Hi Chuck,
Attached are 2 Requisitions for equipment I would have to purchase for the new car we ordered on 03-07-18, if we should move forward in donation the trade-in vehicle to West Geauga Schools for a Resource Officer.
So far I'm at:


Vehicle - \$7,500.00
Light-Bar- \$2,025.00
Radio- \$3212.01
Total - \$12,737.01

I have not priced vehicle graphics yet.

Please let me know what you think,
Thanks,
Tim

Russell Police Department
Chief Timothy Carroll
14820 Chillicothe Road
Novelty, Ohio 44072

Phone# 440-338-6212
Fax# 440-338-6113
Email: tcarroll@russellpolice.com

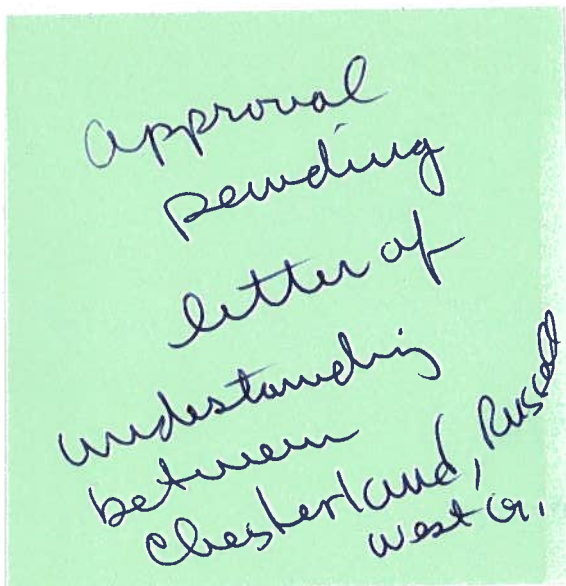

Attachments:

03-23-2018 Requisitions.pdf

474 KB

Russell Police Department Requisition 2018

Number: _____

To: Hall Public Safety
12400 Beechlawn Ave. N.E. Alliance, OH 44601

Corporation: Yes No

Telephone: 855-387-3911 Fax: _____

Date	Placed by	Comments
03-23-2018	T. Carroll	Light-Bar for Cruiser

Qty	Description	Unit Price	Total
01	Whelan Liberty II LED -Light-Bar Red and Blue		\$2,025.00
Shipping and Handling			
Total			\$2,025.00

RPD Number: 2018-034 _____





Estimate
EST-5616

Hall Public Safety Upfitters
Corporate Office
8291 Darrow Rd.
Twinsburg, Ohio 44087
855-387-3911
Hallpublicsafety.com

Remit to/Mailing Address
12400 Beechlawn Ave. N.E.
Alliance, Ohio 44601

Customer
Russell Twp. Police Department
Attn: Chief Carroll
14820 Chillicothe Rd
Novelty, OH 44072

Estimate Date : March 19, 2018
Expiration Date : April 19, 2018
Sales rep : Jason Hall
Project : 2018 Sedan Interceptor
- Car 21

#	Item & Description	Qty	Rate	Amount
1	Whelen Liberty II Lightbar, 48" Red/Blue with LED takedowns and alley lights - use this bar for colored domes SKU : IG8SP1J	1.00	1,750.00	1,750.00
2	Labor (mobile) SKU : Labor (mobile) After removal of needed equipment from cruiser for new cruiser, install old controller back into cruiser and wire into lightbar. This car will be turned over to the school.	1.00 EA	250.00	250.00
3	Misc. wires Misc. wires, connectors and supplies	1.00	25.00	25.00
			Sub Total	2,025.00
			Total	\$2,025.00

Notes:

Thank you for your business !!

****Remit to/Mailing Address****
12400 Beechlawn Ave.
Alliance, Ohio 44601

Terms & Conditions
Estimate is good for 30 days

Russell Police Department Requisition 2018

Number: _____

To: Communications Services
250 Fairgrounds Road Painesville, OH 44077

Corporation: Yes No

Telephone: 440-354-3715 Fax: _____

Date	Placed by	Comments
03-23-2018	T. Carroll	800 Band Radio for cruiser

Qty	Description	Unit Price	Total
01	Motorola APX -4500 Mobile Radio	\$2,932.01	\$2,932.01
	State Contract pricing -Contract #573077-0 STS 073		
Shipping and Handling			
Total			\$2,932.01

RPD Number: 2018-33 _____





MOTOROLA SOLUTIONS

Quote Number: QU0000435007
Effective: 19 MAR 2018
Effective To: 18 MAY 2018

Bill-To:

RUSSELL TOWNSHIP TRUSTEES
P O BOX 522
NOVELTY, OH 44072
United States

Ultimate Destination:

RUSSELL TOWNSHIP TRUSTEES
8501 KINSMAN RD
NOVELTY, OH 44072
United States

Attention:

Name: CHIEF CARROLL
Email: tcarroll@russellpolice.com
Phone: 440-338-6212

Sales Contact:

Name: Samantha Spaulding
Email: sam@comm-serv.com
Phone: 440-354-3715

Contract Number: OHIO STATE
Freight terms: FOB Destination
Payment terms: Net 30 Due

Item	Quantity	Nomenclature	Description	Your price	Extended Price
1	1	M22URS9PW1AN	APX4500 7/800	\$2,932.01	\$2,932.01
1a	1	G335AY	ADD: ANT 1/4 WAVE 762-870MHZ		
1b	1	W22BA	ADD: STD PALM MICROPHONE APEX		
1c	1	G66AW	ADD: DASH MOUNT O2 WWM		
1d	1	G24AX	ADD: 3 YEAR SERVICE FROM THE START LITE		
1e	1	QA02756AD	ADD: 3600 OR 9600 TRUNKING BAUD SINGLE SYSTEM		
1f	1	GA00804AA	ADD: APX O2 CONTROL HEAD (Grey)		
1g	1	G444AH	ADD: APX CONTROL HEAD SOFTWARE	-	-
1h	1	G142AD	ADD: NO SPEAKER NEEDED	-	-
1i	1	GA00235AA	ADD: NO GPS ANTENNA NEEDED	-	-
2	380	SVC03SVC0123D	SUBSCRIBER INSTALL - SVCR LOCATION	\$1.00	\$380.00

Total Quote in USD

\$3,312.01

PO Issued to Motorola Solutions Inc. must:

- >Be a valid Purchase Order (PO)/Contract/Notice to Proceed on Company Letterhead. Note: Purchase Requisitions cannot be accepted
- >Have a PO Number/Contract Number & Date
- >Identify "Motorola Solutions Inc." as the Vendor
- >Have Payment Terms or Contract Number
- >Be issued in the Legal Entity's Name
- >Include a Bill-To Address with a Contact Name and Phone Number
- >Include a Ship-To Address with a Contact Name and Phone Number
- >Include an Ultimate Address (only if different than the Ship-To)
- >Be Greater than or Equal to the Value of the Order
- >Be in a Non-Editable Format
- >Identify Tax Exemption Status (where applicable)
- >Include a Signature (as Required)



BE BETTER EQUIPPED TO BE MISSION READY

APX™ 4500 PROJECT 25 MOBILE RADIO

A downed power line or the city transit system coming to a halt during rush hour, when natural disasters or the unexpected strikes, you must interoperate seamlessly and securely with other agencies and responders – often across multiple Project 25 (P25) systems. You need to instantly connect and be informed to make better decisions and respond effectively. While the advanced technology of APX™ radios expertly equips you for the unexpected, your organization may be challenged to improve operating expenses.

That's where the APX 4500 P25 mobile radio fits the bill perfectly. It delivers all the benefits of TDMA technology in a compact P25 capable mobile. The APX 4500 brings together powerful technology in an easy-to-use radio that's easy on your budget. It seamlessly unifies public works, utility, rural public safety and transportation users to first responders so they can communicate effectively in the moments that matter.

CONVENIENTLY SMALL, EASY TO INSTALL

The APX 4500 is designed to get the job done without getting in the way. A simplified dash mount design makes installation quick and easy, fitting into the existing XTL™ footprint so you can reuse mounting holes and cables.

Count on the APX 4500 to withstand wet, dusty and hazardous conditions, too. Its IP56 durability rating is the highest level of certification for uncompromising durability and world class quality in a mobile performer you can hose down.

KEEPS CREWS IN TOUCH, AND UP TO THE MINUTE

Safety runs in the APX family and the APX 4500 mobile is no exception. Like all our APX P25 radios trusted by responders worldwide, the APX 4500 mobile redefines safety. Your crews can count on quick, seamless interoperability and extended range – whether they are talking from the top of a pole or the bottom of a trench. You can depend on AES encryption for secure, tamperproof voice and data communications every time they connect.

With integrated GPS in the APX 4500, you can keep an eye on workers and assets you can't see, tracking their locations continuously. The O2 control head with color display is easy to read and operate in all lighting conditions, from bright sunlight to dark streets. The intelligent lighting on the O2 control head notifies your workers when a call is received, an emergency arises, or when they are out of range. Plus, an enlarged multifunction knob makes it easy to use talk-group and volume settings when they're wearing gloves.

Over-the-air programming on the APX 4500 keeps your crews current in the field. You can update the latest mobile without interrupting voice communications while they work.

SIZED RIGHT FOR YOUR BUDGET

The APX 4500 lets you reuse many accessories which utilize the O5 and O3 control heads on XTL radios, so you can maximize your investment while you benefit from the latest technology. Since the APX 4500 is P25 Phase 2 capable for twice the voice capacity, you can add more users without adding more frequencies or infrastructure. It is backwards and forwards compatible with all Motorola mission critical radio systems, so you can interoperate with confidence while you improve operating expenses.

STATE CONTRACT PO CHECKLIST

1. Made out to: **Motorola Solutions, Inc.**
1301 E. Algonquin Road
Schaumburg, IL 60196
2. Payment Terms: Reference "Ohio State Term Contract 573077-0, STS 073."
3. Bill to Address: Your Billing Address
4. Ultimate Destination Address: Your Physical Address
5. **SHIP TO ADDRESS: COMMUNICATIONS SERVICE**
250 FAIRGROUNDS ROAD
PAINESVILLE, OH 44077
6. Contact Name & Phone Number
7. PO should be sent to **Communications Service**
250 Fairgrounds Road
Painesville, OH 44077

PRODUCT SPEC SHEET
APX™ 4500



APX™ 4500 SPECIFICATIONS

FEATURES AND BENEFITS:

Available in 700/800 MHz, VHF bands

Channels: Standard 512

Trunking Standards supported:

- Clear or digital encrypted Trunked Operation
- Capable of SmartZone®, SmartZone Omnilink, SmartNet®

Analog MDC-1200 and Digital APCO P25

Conventional System Configurations

Narrow and wide bandwidth digital receiver

(6.25kHz/12.5kHz/25kHz/30 kHz)

Embedded digital signaling (ASTRO and ASTRO 25)

Integrated GPS capable

Integrated Encryption Hardware

Intelligent lighting

Radio profiles

Unified Call List

Meets applicable MIL-STD 810C, D, E, F, G

Ships standard IP56

Utilizes Windows XP, Vista and Windows 7

Customer Programming Software (CPS)

- Supports USB Communications
- Built in FLASHport™ support

Re-use of most XTL™ accessories, plus new IMPRES accessories

OPTIONAL FEATURES:

AES Encryption

Programming over Project 25 (POP25)

Text Messaging

12 character RF ID asset tracking

Tactical OTAR

TRANSMITTER - TYPICAL PERFORMANCE SPECIFICATIONS

	700 MHz	800 MHz	VHF
Frequency Range/Bandsplits	764-776 MHz 794-806 MHz	806-824 MHz 851-870 MHz	136-174 MHz
Channel Spacing	25/12.5 kHz	25/12.5 kHz	30/25/12.5 kHz
Maximum Frequency Separation	Full Bandsplit	Full Bandsplit	Full Bandsplit
Rated RF Output Power Adj ¹	10-30 Watts	10-35 Watts	5-50 Watts
Frequency Stability ² (-30°C to +60°C; +25°C Ref.)	±0.00015 %	±0.00015 %	±0.0002 %
Modulation Limiting ³	±5 kHz / ±2.5 kHz	±5 kHz/±4 kHz (NPSPEC) /±2.5 kHz	±5 kHz / ±2.5 kHz
Modulation Fidelity (C4FM) 12.5kHz Digital Channel	±2.8 kHz	±2.8 kHz	±2.8 kHz
Emissions ⁴	Conducted+ -75/-85 dBc Radiated+ -20/-40 dBm	Conducted Radiated -75 dBc -20 dBm	Conducted Radiated -85 dBc -20 dBm
Audio Response ⁵	+1, -3 dB (EIA)	+1, -3 dB (EIA)	+1, -3 dB (EIA)
FM Hum & Noise	25 kHz 12.5 kHz -50 dB -48 dB	-50 dB -48 dB	-53 dB -52 dB
Audio Distortion ⁶	2 %	2 %	2 %

PRODUCT SPEC SHEET
APX™ 4500

APX 4500 CONTROL HEAD PORTFOLIO



02 RUGGED CONTROL HEAD

- Large color display with intelligent lighting
- 3 lines of text 14 characters max / 1 line of icons / 1 line of menus
- Built in 7.5 watt speaker
- Multifunction volume/channel knob
- Night/day mode button

RECEIVER – TYPICAL PERFORMANCE SPECIFICATIONS

		700 MHz	800 MHz	VHF
Frequency Range/Bandsplits		764-776 MHz	851-870 MHz	136-174 MHz
Channel Spacing		25/12.5 kHz	25/12.5 kHz	30/25/12.5 kHz
Maximum Frequency Separation		Full Bandsplit	Full Bandsplit	Full Bandsplit
Audio Output Power at 3% distortion ¹		7.5 W or 15 W ++	7.5 W or 15 W ++	7.5 W or 15 W ++
Frequency Stability ² (-30°C to +60°C; +25°C Ref.)		+/-0.8 PPM	+/-0.8 PPM	+/-0.8 PPM
Analog Sensitivity ³	12 dB SINAD	-121 dBm	-121 dBm	Pre-Amp -123 dBm
Digital Sensitivity	5% BER	-121.5 dBm	-121.5 dBm	Standard -119 dBm
Intermodulation	25 kHz	82 dB	82 dB	84 dB
	12.5 kHz	82 dB	82 dB	85 dB
Spurious Rejection		91 dB	91 dB	95 dB
Audio Distortion at rated ⁴		1.20%	1.20%	1.20%
FM Hum & Noise	25 kHz	59 dB	59 dB	59 dB
	12.5 kHz	50 dB	50 dB	50 dB
Selectivity ⁵	25 kHz	85 dB	85 dB	85 dB
	12.5 kHz	75 dB	75 dB	75 dB
	30 kHz	—	—	90 dB

SIGNALING (ASTRO MODE)

Signaling Rate	9.6 kbps
Digital ID Capacity	10,000,000 Conventional / 48,000 Trunking
Digital Network Access Codes	4,096 network site addresses
ASTRO® Digital User Group Addresses	4,096 network site addresses
Project 25 – CAI Digital User Group Addresses	65,000 Conventional / 4,094 Trunking
Error Correction Techniques	Goley, BCH, Reed-Solomon codes
Data Access Control	Slotted CSMA: Utilizes infrastructure-sourced data status bits embedded in both voice and data transmissions

GPS SPECIFICATIONS

Channels	12
Tracking Sensitivity	-153 dBm
Accuracy**	<10 meters (95%)
Cold Start	<60 seconds (95%)
Hot Start	<10 seconds (95%)
Mode of Operation	Autonomous (Non-Assisted) GPS

PRODUCT SPEC SHEET
APX™ 4500

MOBILE MILITARY STANDARDS 810 C, D, E, F, G

	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G	
	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	II	500.5	II
High Temperature Storage	501.1	I	501.2	I/A1	501.3	I/A1	501.4	I/Hot	501.5	I/A1
High Temperature Operation	501.1	II	501.2	II/A1	501.3	II/A1	501.4	II/Hot	501.5	II
Low Temperature Storage	502.1	I	502.2	I/C3	502.3	I/C3	502.4	I/C3	502.5	I/C3
Low Temperature Operation	502.1	I	502.2	II/C1	502.3	II/C1	502.4	II/C1	502.5	II
Temperature Shock	503.1	-	503.2	I/A1-C3	503.3	I/A1-C3	503.4	I/Hot-C3	503.5	I/C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I/A1
Rain Blowing	506.1	I	506.2	I	506.3	I	506.4	I	506.5	I
Rain Steady	506.1	II	506.2	II	506.3	II	506.4	III	506.5	III
Humidity	507.1	II	507.2	II	507.3	II	507.4	-	507.5	II-Aggravated
Salt Fog	509.1	-	509.2	-	509.3	-	509.4	-	509.5	I Proc
Blowing Dust	510.1	I	510.2	I	510.3	I	510.4	I	510.5	I
Blowing Sand	-	-	510.2	II	510.3	II	510.4	II	510.5	II
Vibration Min. Integrity	514.2	VIII/F, Curve-W	514.3	I/10	514.4	I/10	514.5	I/24	514.6	I-Cat.24
Vibration Loose Cargo	514.2	XI	514.3	II/3	514.4	II/3	514.5	II/5	514.6	-
Shock Functional	516.2	I	516.3	I	516.4	I	516.5	I	516.6	I, V, VI

ENCRYPTION

Supported Encryption Algorithms	AES and ADP
Encryption Algorithm Capacity	Single
Encryption Keys per Radio	Module capable of storing 1024 keys. Programmable for 64 Common Key Reference (CKR) or 16 Physical Identifier (PID)
Encryption Frame Re-sync Interval	P25 CAI 300 mSec
Encryption Keying	Key Loader
Synchronization	XL – Counter Addressing, OFB – Output Feedback
Vector Generator	National Institute of Standards and Technology (NIST) approved random number generator
Encryption Type	Digital
Key Storage	Tamper protected volatile or non-volatile memory
Key Erasure	Keyboard command and tamper detection
Standards	FIPS 140-2 Level 3 FIPS 197

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-30°C / +60°C
Storage Temperature	-40°C / +85°C
Humidity	Per MIL-STD
ESD	IEC 801-2 KV
Water and Dust Intrusion	IP56, MIL-STD

- Measured in the analog mode per TIA/EIA 603 under nominal conditions
- ** Accuracy specs are for long-term tracking (95th percentile values >5 satellites visible at a nominal -130 dBm signal strength)
- + Specs includes performance for the non-GNSS/GNSS bands
- ++ Output power in to 8 and 3.2 Ohm external speakers respectively

Specifications subject to change without notice. All specifications shown are typical. Radio meets applicable regulatory requirements.

Motorola Solutions, Inc. 1301 E. Algonquin Road, Schaumburg, Illinois 60196 U.S.A. www.motorolasolutions.com

MOTOROLA, MOTOROLA SOLUTIONS, and the stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners © Motorola Solutions, Inc. 2012 R3-1-2053

